

WIRES ARE HOUSED IN A VINYL TUBE.
T IS THE EARTH TERMINAL.



Dimensions in mm.

FEATURES
CARATTERISTICHE

MODEL MODELLO	103 - H8223 - 6540 (103 - H8223 - 6510)
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	9
UNIPOLAR CURRENT (Amp)	
RESISTANCE (Ohm)	0.2
INDUCTANCE (mH)	1.4
BIPOLAR HOLDING TORQUE (Ncm)	790
UNIPOLAR HOLDING TORQUE (Ncm)	
ROTOR INERTIA (Kgm ² x 10 ⁻⁷)	4350
THEORETICAL ACCELERATION (rad x sec. ⁻²)	18200
BACK E.M.F. (V/Krpm)	88
MASS (Kg)	3.5
PROTECTION DEGREE	IP43
LEADS CODE	V

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

TORQUE/SPEED CURVE
CURVA DI COPPIA/VELOCITÀ

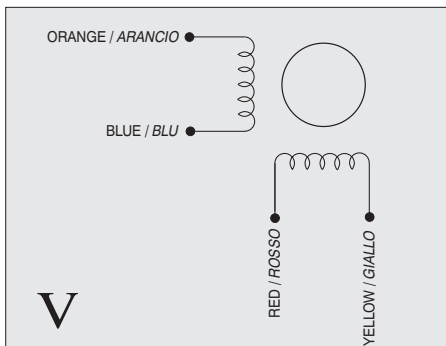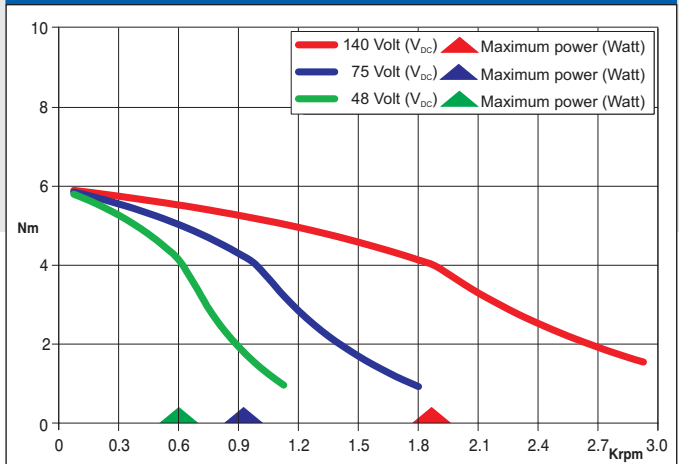

Suggested R.T.A. driver: PLUS Series.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855 - Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzer Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, 1° 3°
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805 - Fax +34.936.334.595
www.rta-iberica.es