


103-845-67S41

SANYO DENKI
SANMOTION


Dimensions (Unit:mm)

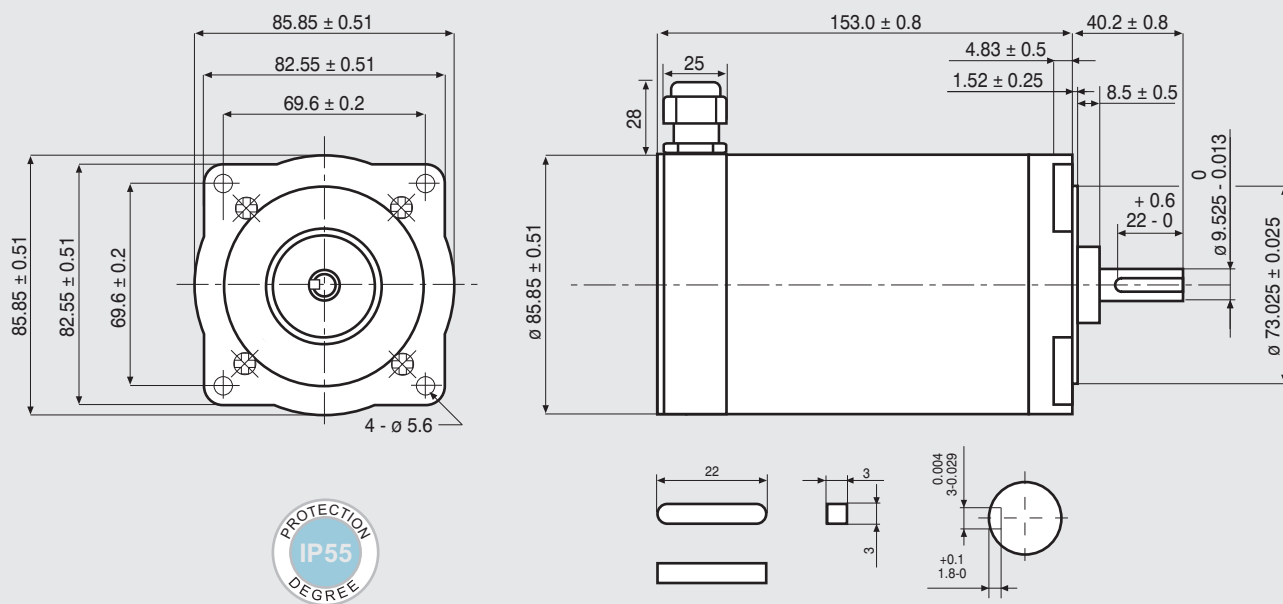



FEATURES

MODEL	103-845-67S41
BASIC STEP ANGLE	$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT (Amp)	9.5
UNIPOLAR CURRENT (Amp)	6.7
RESISTANCE (Ohm)	0.45
INDUCTANCE (mH)	2.0
BIPOLAR HOLDING TORQUE (Ncm)	510
UNIPOLAR HOLDING TORQUE (Ncm)	410
ROTOR INERTIA ($\text{Kgm}^2 \times 10^{-7}$)	1550
THEORETICAL ACCELERATION ($\text{rad} \times \text{sec}^{-2}$)	32900
BACK E.M.F. (V/Krpm)	46
MASS (Kg)	3.9
PROTECTION DEGREE	IP55
LEADS CODE	VI

TORQUE/SPEED CURVE

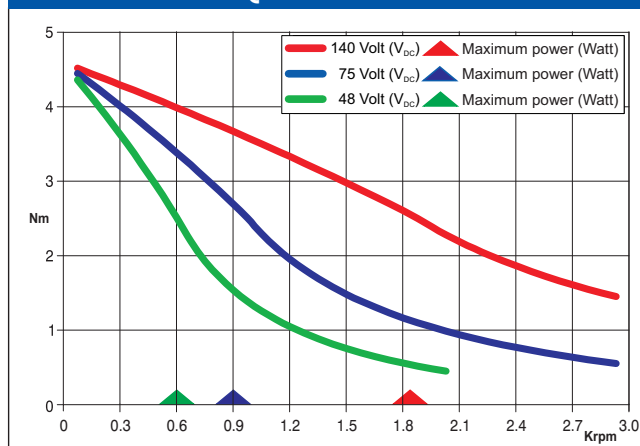

VI

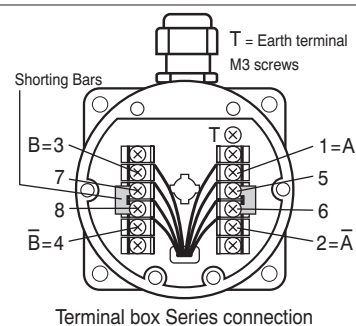

Suggested R.T.A. driver: PLUS Series.



R.T.A. s.r.l.
Via E. Mattei - Fraz. Divisa
27020 MARCIGNAGO (PV) ITALY
Tel. +39.0382.929.855 - Fax +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitz Straße 34
40599 DÜSSELDORF (Germany)
Tel. +49.211.749.668.60 - Fax +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA-Motion Control Systems S.L.
C/Generalitat 22, 1° 3°
08850 GAVA - BARCELONA (Spain)
Tel. +34.936.388.805 - Fax +34.936.334.595
www.rta-iberica.es

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

EMC - 10-14